


# NON-ELECTRIC SMART TOILET

## Installation instruction and user manual

---

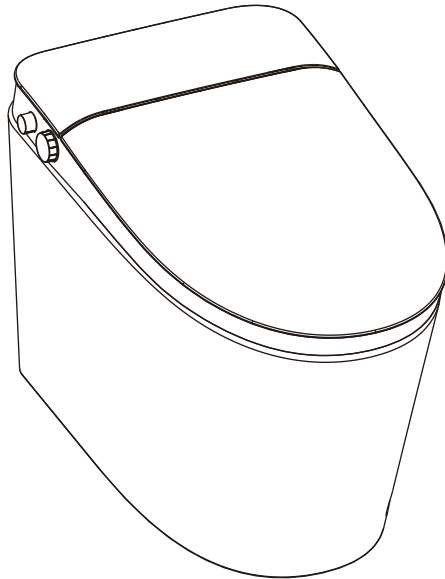

**IMPORTANT** - Carefully remove any packaging before use, but retain the safety instructions. Please take note of all of the safety warnings listed in these instructions. Please read these instructions in their entirety and retain them for future reference. These instructions should be stored with the product.

---

### **WE'RE READY TO HELP YOU**

For any questions or help, please email us: [Support@clickmycart.com](mailto:Support@clickmycart.com)

# **THANK YOU FOR PURCHASING THIS NON-ELECTRIC SMART TOILET.**

Before you install and use it, please read the instructions and related illustrations carefully.

There may be differences between the actual product and the illustrations.

If you encounter any problems with installation or performance, please do not hesitate to contact us.

# CONTENTS

---

|                                            |           |
|--------------------------------------------|-----------|
| <b>Chapter 1 Safety Precautions</b>        | <b>01</b> |
| 1.1 Normal use                             | 01        |
| 1.2 User requirement                       | 02        |
| 1.3 Toilet seat use                        | 02        |
| 1.4 Other safety precautions               | 02        |
| <b>Chapter 2 Installation Instructions</b> | <b>06</b> |
| 2.1 Toilet main body                       | 06        |
| 2.2 List of Materials                      | 07        |
| 2.3 Tools Required For Installtion         | 07        |
| 2.4 Important note for installation        | 07        |
| 2.5 Product installation                   | 08        |
| <b>Chapter 3 Cleaning and Maintenance</b>  | <b>10</b> |
| 3.1 Toilet seat cleaning                   | 10        |
| 3.2 Bidet and Female wash nozzle cleaning  | 10        |
| 3.3 Product maintenance                    | 11        |
| 3.4 Product maintenance in winter          | 11        |

# Chapter 1 Safety Precautions

In order to prevent harm to the user or others and property damage, please read the [Safety Precautions] carefully.

|                                                                                                           |                                                                            |
|-----------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|
|  <p><b>Warning</b></p>    | Serious consequences or injury may result if this sign is disregarded.     |
|  <p><b>Attention</b></p> | Personal injury or property damage may result if this sign is disregarded. |

The sign and its meaning are described as follows:

-  This sign indicates 'mandatory' content that must be implemented.
-  This sign indicates that 'Prohibited' contents are not allowed.

**CAUTION!**

**TWO PERSON LIFT REQUIRED**

**2 PEOPLE ARE REQUIRED TO LIFT AND DURING ENTIRE INSTALLATION OF THIS PRODUCT**

Overall package weighs over 100 pounds! Two people are required to carefully unpack the product to avoid personal injuries

Prior to installation, inspect the toilet to ensure that no damage has occurred in transit. If damage has occurred, or a visible defect exists, do not proceed with installation, and advise your supplier immediately.

**CAUTION:** Risk of personal injury or product damage. Handle with care. Vitreous china can break or chip if the product is handled carelessly.

To ensure that you enjoy the functions of this product, please read these instructions carefully. Please keep this manual properly and be sure to bring it with you when you pass it on to someone else for use. All instructions have been confirmed at the time of printing and delivery in accordance with the latest technical conditions of the equipment. We reserve the right to make changes due to further developments.

## 1.1 Normal use

This product is a Non-electric smart toilet with rear & lady wash and other comfortable functions, which also can be used as an ordinary toilet. It can only be used for enclosed spaces, any other use will be deemed to be inconsistent with normal use.  
The Company shall not be liable for abnormal use.

---

## 1.2 User requirement

Persons (including children) with physical, sensory, or mental impairments or lack of experience and common sense must be supervised in the use of the product and children should not play with the product.

## 1.3 Toilet seat use

Cold water for this appliance should be connected from the main water supply. Use the new hose assembly supplied with the appliance. The old hose assembly cannot be reused.

The water inlet pressure of this product is: 11psi-108psi.

Do not intentionally soil, spray or clog the cleaning jets.

Do not flush newspapers, diapers, sanitary napkins, or other items that tend to clog the product.

Maintenance work must be carried out by a relevant professional.

Do not use accessories that we have not recommended for use.

## 1.4 Other safety precautions



Persons with disabilities and persons with limited experience or common sense (including children) need to be supervised in the use of this product.

This product must be connected to a cold water supply (inlet water temperature approximately 39.2°F to 95°F). Otherwise, it may be scalded or the toilet may malfunction.

In the event of an abnormality or malfunction, close the water inlet valve and stop using the product.

Abnormal and malfunctioning conditions such as:

- Product is cracked or broken

- Abnormal sound and burning smell

- Water seeping from piping or inside the product

Continuing to use the product despite a malfunction may result in injury, or water seepage from the interior.



Do not pick up the product by grasping the lid or seat.


Do not open the lid or seat when there is an object on it.

Failure to do so may cause damage to the product, resulting in personal injury.

Do not use adhesive materials such as double-sided tape on the surface of the product.

Otherwise, it may cause damage to the surface.

## **WARNING**



### **Accessories**

Be sure to use the included or specified parts for installation work. Otherwise, the product may not be installed properly.



### **Installation**

Carry out the installation work according to this installation manual. Otherwise, damage caused by water leaks may occur.



### **Drain the water inlet hose**

When not in use for a long time, drain the water inlet hose. Otherwise, it may cause water contamination and skin infection.



### **No disassembly**

Do not disassemble or repair or modify this product by yourself for any purpose.

## ⚠ ATTENTION



### Prohibit

Do not bend, twist and damage the water supply hose. Otherwise, it may cause water leakage or insufficient flushing performance of the toilet.



### Prohibit

Do not lean on the toilet lid. It may damage the seat cover, lead to injuries.




### Prohibit

Children should not play with this product. Otherwise, as it may result in damage or personal injury.



### Prohibit

Do not install this product in a room where frost may form. Indoor temperature must not fall below 39.2°F.



### Prohibit

Do not expose this product directly to water, strong light or sunlight. Otherwise, it may cause fading.

## **ATTENTION**



### **Prohibit**

Do not close the lid and seat with force.  
Otherwise, it may damage the product.



### **Prohibit**

Do not pour urine on toilet main body and its nozzle. Otherwise, it may result in malfunction or stains such as pink and teal colors.



### **Prohibit**

Do not use the following items to clean this product:  
Gasoline, banana water, benzene, paint thinner, decontamination powder  
and nylon brush. It may damage the water inlet pipe or the product.




### **Prohibit**

Do not connect to any waste water, mixed water, industrial water,  
seawater, or other untreated or semi-treated water.  
It may lead to a skin infection or a malfunction.





---

# Chapter 2 Installation Instructions


## 2.1 Toilet main body

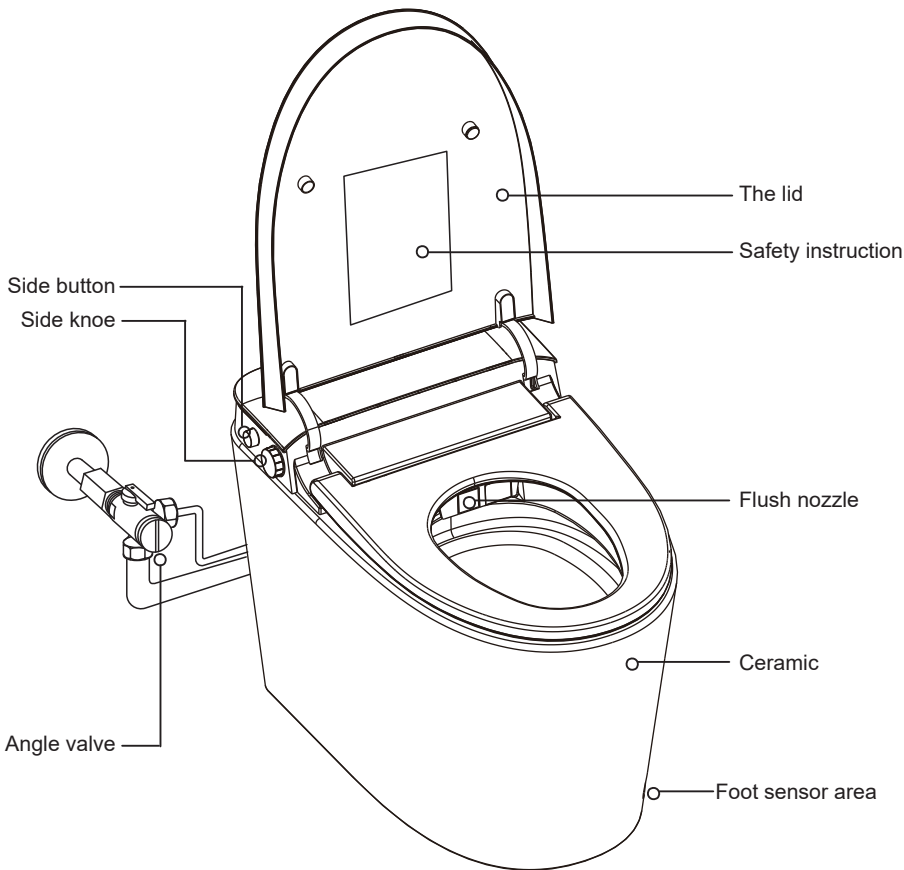

2.2 List of Materials

|                                                                                                    |                                                                                                                           |                                                                                                              |
|----------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
|  <p>Main body</p> |  <p>Ceramic mounting accessories (1)</p> |  <p>Seal ring (1)</p>       |
|                                                                                                    |  <p>Angle valve (1)</p>                  |  <p>Adapter Fitting (1)</p> |

2.3 Tools Required For Installation

|                                                                                                          |                                                                                                              |                                                                                                                 |
|----------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|
|  <p>Pencil / Marker</p> |  <p>Tape Measure</p>        |  <p>Teflon tape</p>            |
|  <p>Knife</p>         |  <p>Adjustable Wrench</p> |  <p>Silicone / Caulk Gun</p> |

2.4 Important note for installation

About installation instructions

This installation instruction is used to guide the correct installation of the intelligent toilet. Please read it carefully before installation.

Read the installation instructions in this chapter

This intelligent toilet device and related water pipes can only be installed by qualified plumbers.

## Safety instructions

### **Attention** Product or performance damage

\* Be sure to comply with your country's standards and local installation regulations.

### **Attention** Product damage caused by the water freezing

\* It is prohibited to install the intelligent toilet in a room where there is a risk of frost. The minimum room temperature should not be less than 39.2°F.

\* Put the toilet in the room for 24 hours before installing it in a low temperature area.

### **Attention**

\* All length units in this installation instruction are millimetre ( mm ).

\* This product should be permanently connected to the water pipe. Do not remove the water pipe assembly except for installation and maintenance.

## 2.5 Product installation

### ■ Matters need attention

Secure the space required for toilet installation and at the same time, check door opening / closing for possible interference.

Turn on water supply to the product after completing all installation work.

Use care not to damage the end of the connection hose.


The minimum required water pressure ( flowing ) is 0.1 MPa.

while the maximum water pressure ( static ) is 0.75 MPa.


Please wash away the dust or sand in the water supply pipe completely before installing the water supply valve.

Make sure before installation that the water supply source and water drain pipe are in the specified positions according to the diagram. If this not positioned properly the product may not be able to be installed correctly.

### ■ Product size

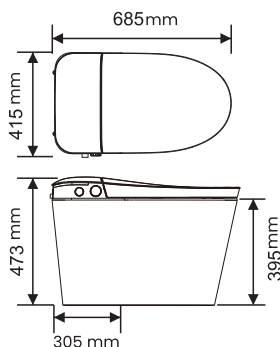


### ■ Reference drawing of the inlet and drainage position

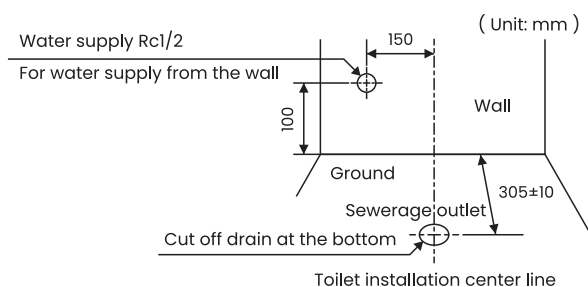

**Attention:** Before install the angle valve, drain the gravel and other impurities from the water inlet pipe

## ■ Installation Instructions


A

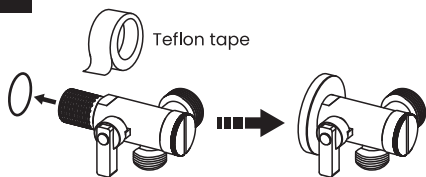

### Installing ball valves

Wrap teflon tape around the angle valves.  
Replace the existing angle valve with our angle valve to ensure optimal performance of the toilet.


B

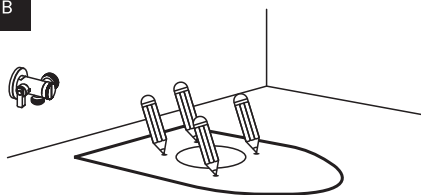

### Positioning Marker Point

Use a pen and the positioning template to clearly mark the points, ensuring precision drilling.


C

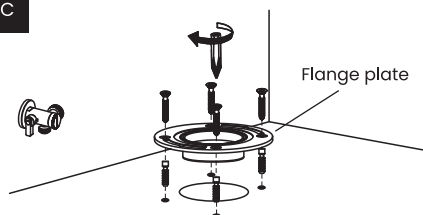

### Install the flange plate

After drilling the holes, insert the sleeve into each hole, position the flange plate, and fasten securely with screws.


D

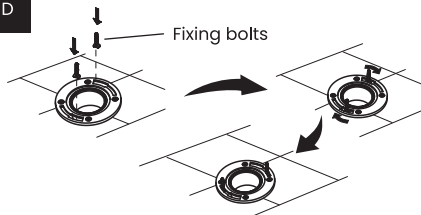

### Assemble the bolts

Position correctly the two fixing bolts of the flange


E

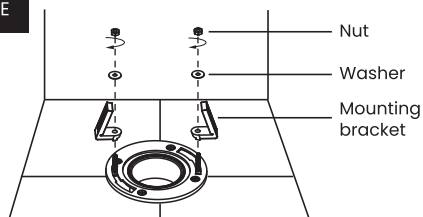

### Mounting bracket

Assemble the mounting bracket with bolts and then install them to the pre-installed flange plate on the ground and lock tightly with nuts.


F

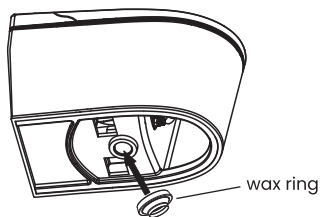

### Install the wax ring

Insert the wax ring under the drain hole.

G




### Installing a toilet

Position the toilet on the floor drain, making sure the flange plate are aligned with the wax ring.

H


Mounting  
bracket  
Fixing sleeve  
Screw  
Decorative  
cap



### Secure the toilet

Pass the screw through the anchor sleeve and mounting holes. Tighten securely to the bracket using a tool. Finally, fit the decorative cover.


I

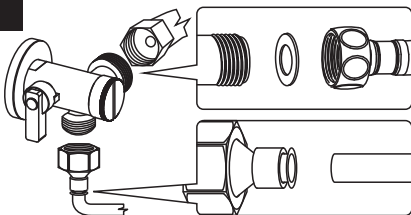

### Connect Water Inlet

Make final connection of water supply hose to shut-off valve. Test the system for leaks.

J

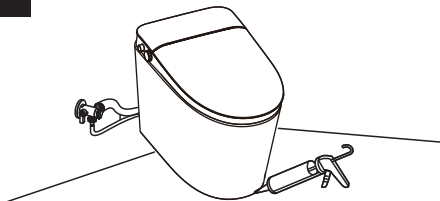

### Finishing Installation

Apply a suitable sealant between the Flush Toilet and adjacent surfaces.

# Chapter 3 Cleaning and Maintenance


## 3.1 Toilet seat cleaning

Clean the toilet regularly or as soon as it becomes soiled. If cleaning is not carried out regularly, dirt may become more visible and become stubborn.

Note that improper cleaning may result in yellowing of colors or peeling of paint.

- Do not use aggressive doses of detergents or cleaning agents containing chlorine or acid.
- Use only cleaners and equipment specifically designed for this application.
- Follow the cleaner product instructions.
- Never mix cleaning agents.

Wipe with a soft cloth soaked in water and wrung out. Neutral soap is the ideal daily cleaner.

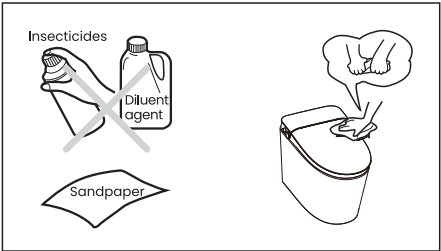


### Cleaning the external parts of the product

Please use a sponge or soft cloth with room temperature water or neutral cleaner to wipe the surface of the product.

Lift up the lid and seat when cleaning other parts with detergent.

Wait until the cleaner in the ceramic toilet seat is completely rinsed out before close the lid, otherwise the evaporation of the cleaner may corrode the surface.

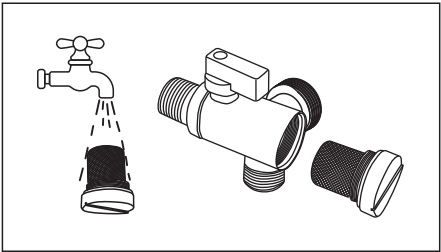

### Cleaning the filter


Close the angle valve, then spin out the filter on the angle valve, remove the filter and then rinse under the faucet to clean the impurities.

Clean the filter when the water flow is smaller than normal.

After cleaning, put the filter back.

## 3.2 Bidet and Female wash nozzle cleaning

Clean the nozzles of the spray tube regularly or as soon as dirt is found.

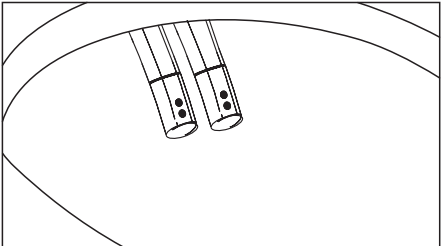

Use your hand or a tool to pull out the nozzle.

(To prevent the nozzle from retracting, it is recommended to secure it with a clip.)

Remove the nozzle and clean the nozzle with a cloth, sponge or brush and a neutral detergent.


---

### 3.3 Product maintenance


Close the angle valve and remove the hose to drain the water in the following cases.

- When water may freeze in cold areas.
- When not in use for a long period of time.

Otherwise, the residual water may deteriorate and cause skin infections.

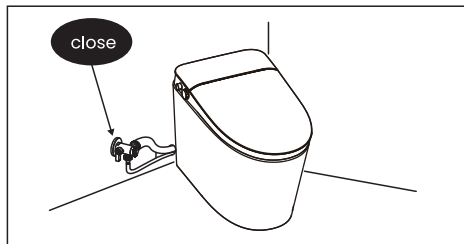

a. Close the angle valve to stop water supply to the system.

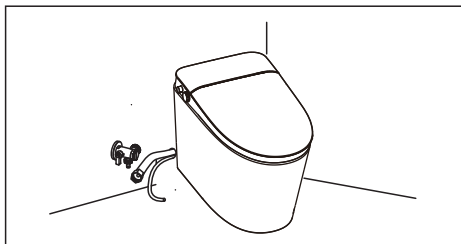

b. Remove the water inlet hose from the angle valve and drain the water.

### 3.4 Product maintenance in winter

When freezing may occur, such as in winter, take precautionary measures to prevent damage to hoses or products due to freezing.

To prevent damage to hoses or products due to freezing, take precautions against freezing:

Raise the room temperature.

Close the angle valve and drain the water inlet hose.

**THANK YOU FOR CHOOSING US**